

Aluminium Radiator Valve

DN 76




DN 80



DN 100





Montage
Assembling

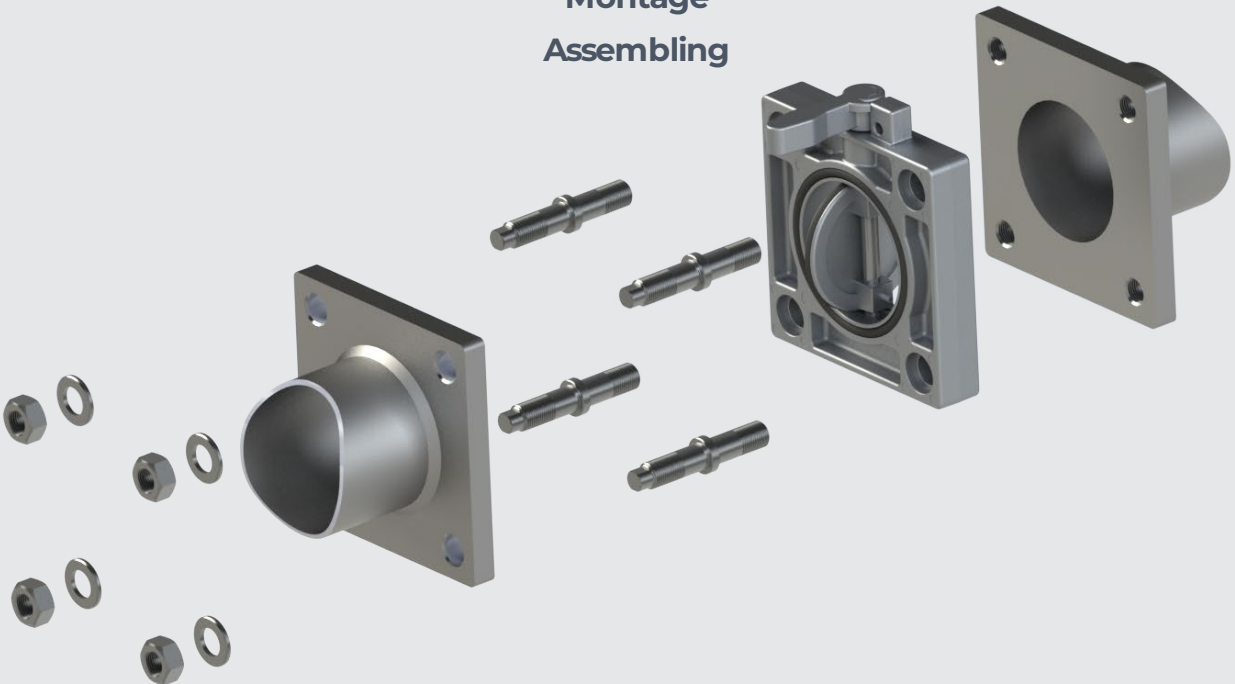


ALUMINIUM RADIATOR VALVE

DN 76 / 80 / 100 / OIL- AND VACUUM-TIGHT

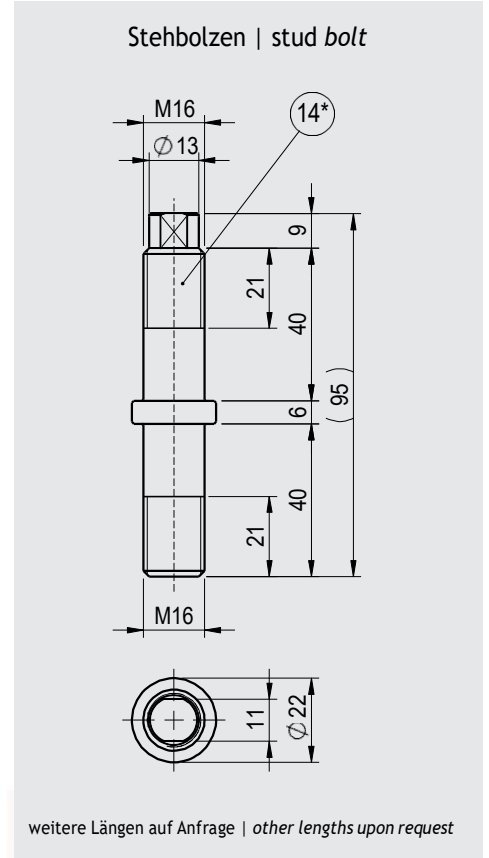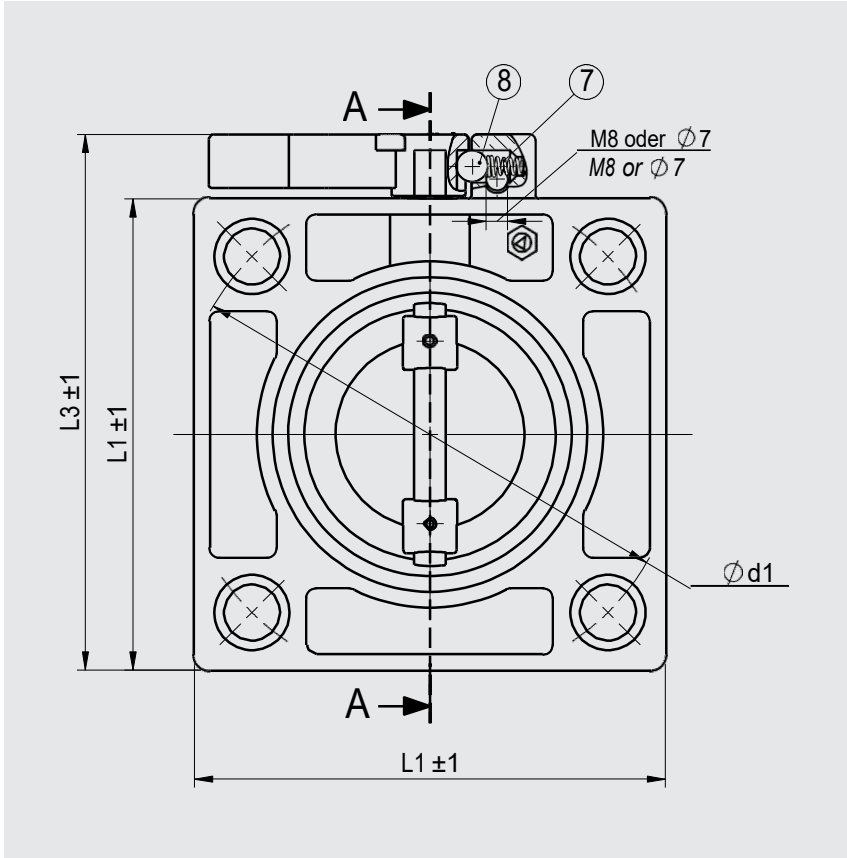

DN	Ø d	Ø d1	L1	L2	L3	H	Ø D	A	B	Pos. 13* Item 13*
76	76	125	125	125	145	24	84	5.6	3.9	84x5
80	80	160	150	150	170	30	89	5.6	3.9	90x5
80	80	160	150	150	170	30	99	5.6	3.9	100x5.33
80	80	160	150	150	170	30	94.2	5.6	3.9	95x5
100	102	170	150	150	170	32	123.5	5.6	3.9	123.19x5.33

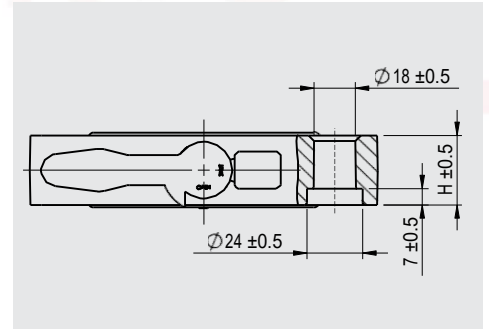

Item	Descriptions	Remarks	Q'ty		
			DN76	DN80	DN100
1	flange	G-AlSi12Cu	1	1	1
2	clap	G-AlSi12Cu	1	1	1
3	handle	G-AlSi12Cu	1	1	1
4	spindle	X8CrNi18-9 (1.4305) AISI 303	1	1	1
5	thrust screw	CuZn39Pb3 (CW614N)	1	1	1
6	washer	CuZn39Pb3 (CW614N)	-	1	1
7	helical spring	X10CrNi18-8 (1.4310) AISI 301	1	1	1
8	ball	X20Cr13 (1.4021) AISI 420	1	1	1
9	dowel pin	X10CrNi18-8 (1.4310) AISI 301	2	2	2
10	dowel pin	X10CrNi18-8 (1.4310) AISI 301	1	1	1
11	O-Ring	NBR	1	-	-
		Viton (FKM)	-	2	2
12	O-Ring	NBR / Viton (FKM)	1	1	1
upon request					
13*	O-Ring	NBR / Viton (FKM)	2	2	2
14*	bolt	X8CrNi18-9 (1.4305) AISI 303	4	4	4

