



Pressure Safety Valve

MPRV



- ◆ Pressure relief of increasing pressure
- ◆ Protected internal mechanism
- ◆ Directioned oil drainage
- ◆ Corrosion resistant coating
- ◆ Adjustable pressure between 30 - 70 kPa
- ◆ Temperature range: -25 °C / +100 °C
- ◆ Visual operation indicator



PRESSURE SAFETY VALVE

TYPE MPRV-50

Code No:MP 26
Section A-A

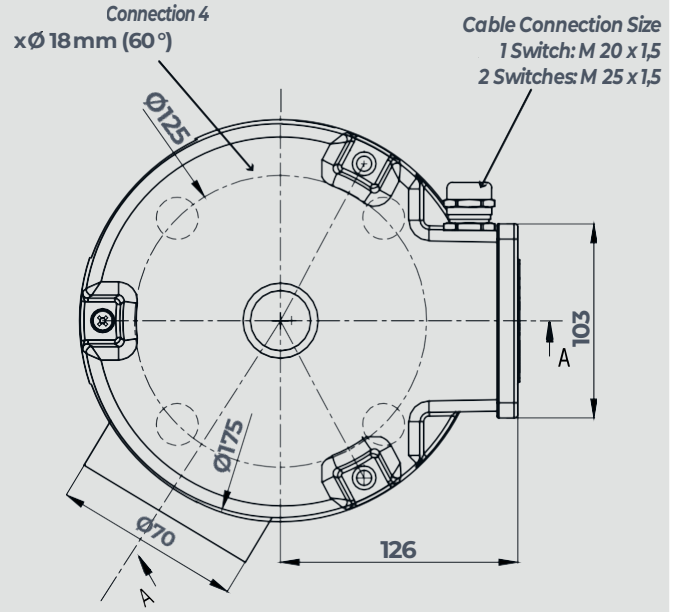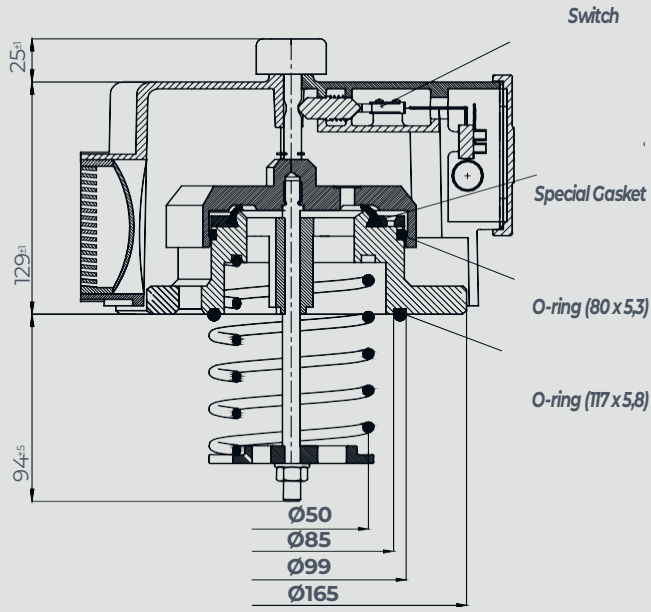

Contact Types

Normally Open 1 Contact




Changeover 1 Contact




Normally Open 2 Contacts



Changeover 2 Contacts







Visual Indicator

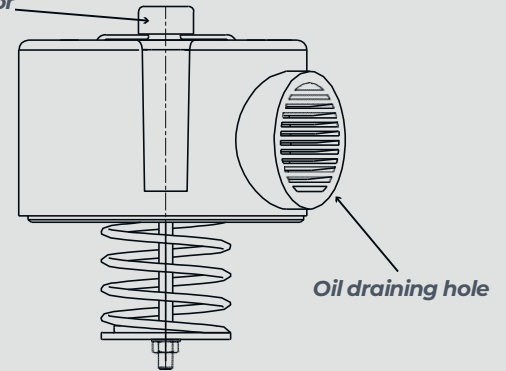

Contact Type	Voltage (V)	Max. Current
SS5GL-2	125 (AC)	5 A
	250 (AC)	3 A
	30 (DC)	4 A
	125 (DC)	0,4 A



PRESSURE SAFETY VALVE

TYPE MPRV-80

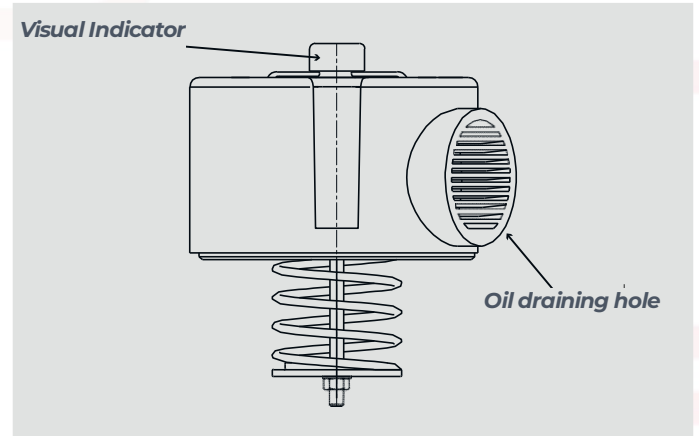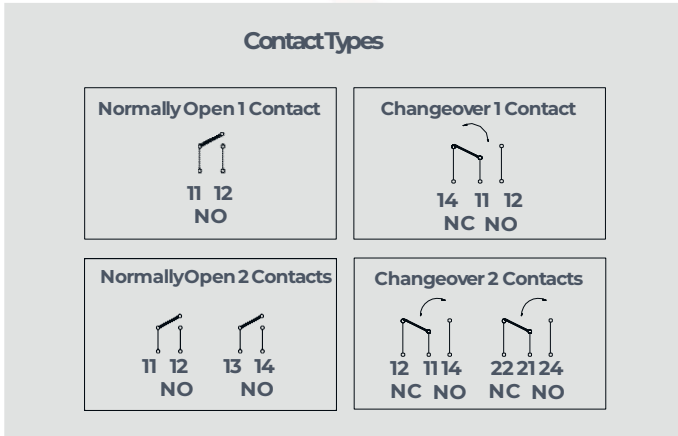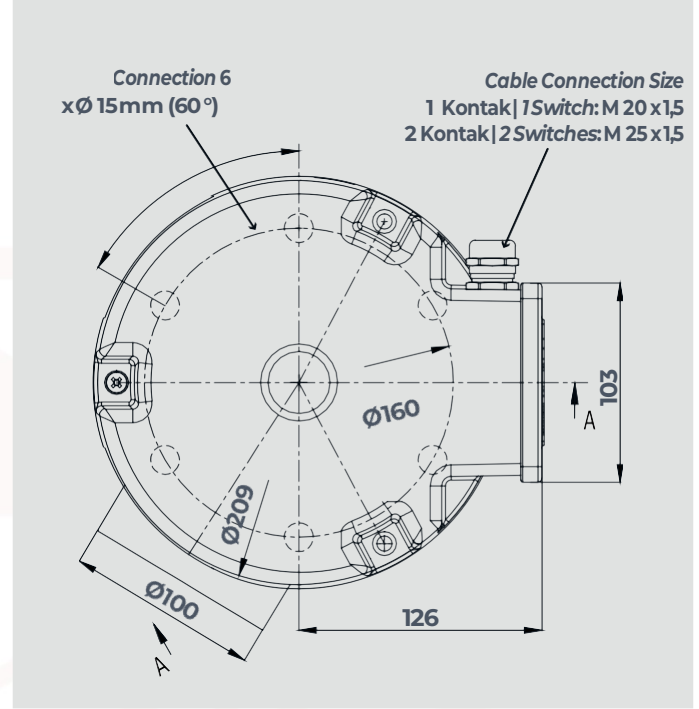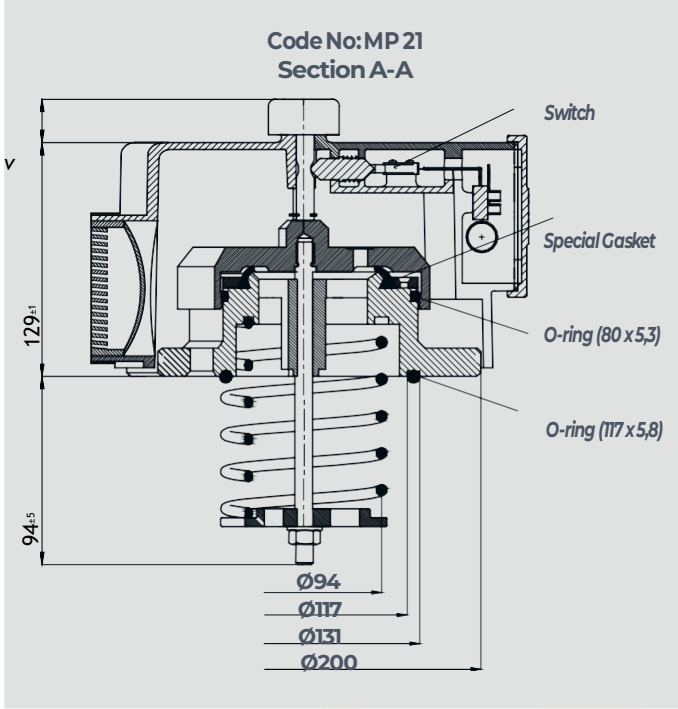

Contact Type	Voltage (V)	Max. Current
SS5GL-2	125 (AC)	5 A
	250 (AC)	3 A
	30 (DC)	4 A
	125 (DC)	0,4 A

PRESSURE SAFETY VALVE
TYPE MPRD-80V / MPRD-50V

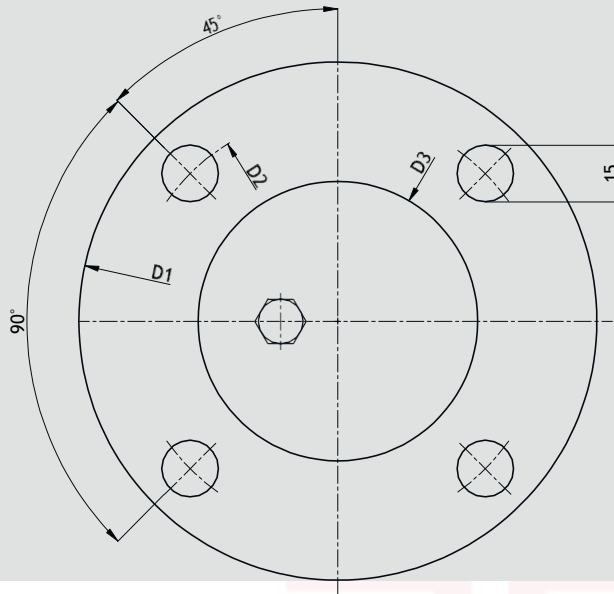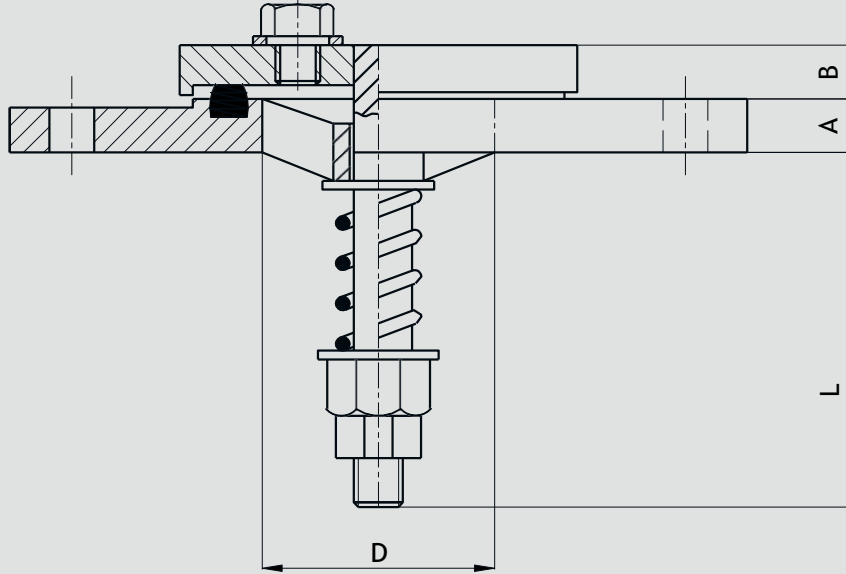

Kod No.	Tip	L max	A	B	D	D1	D2	D3
AP22	MPRD 50V	92	12	6	52	165	125	79
AP23	MPRD 80V	139	14	6	80	200	160	117