

Pressure Safety Valve


PRD



PRESSURE RELIEF DEVICE PRD 1"
IN ACCORDANCE WITH EN 50216-5

Setting value on request between 20 and 70 kPa (-5/+7 kPa).

The fixed value will be marked onto the body.

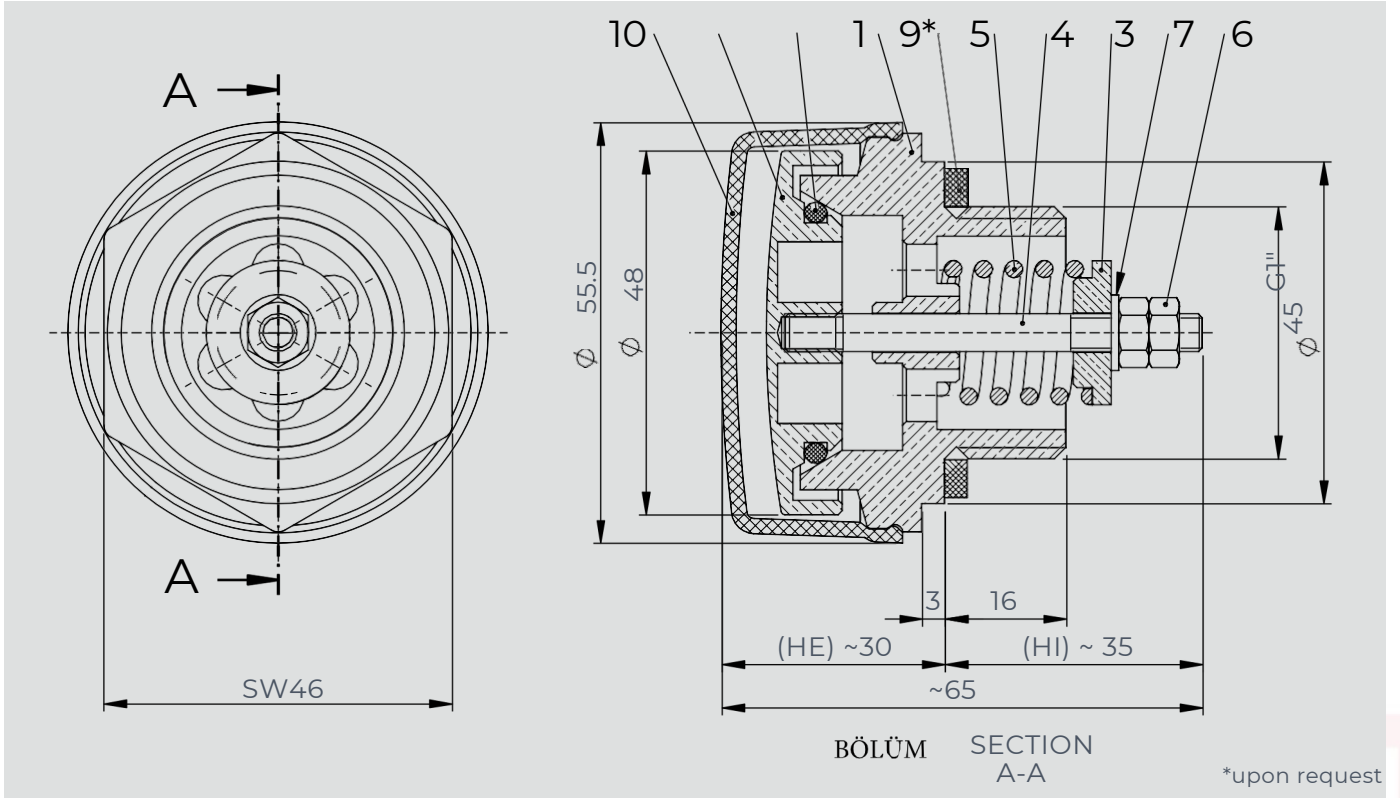


Item	Q'ty	Description	Remarks
1		body	CuZn40Pb2 (CW617N)
2	1	valve cap	CuZn40Pb2(CW617N)
3	1	centering washer	CuZn40Pb2(CW617N)
4	1	stud bolt	X8CrNiS18-9 (1.4305) / AISI 304
5	1	spring	X10CrNi18-8 (1.4310) / AISI 301
6	2	hex nut	DIN 934 - M 5 / A2-70
7	1	washer	DIN125A-M5/A2
8	1	O-ring	FKM (Viton)
9	1	gasket	Hecker Centellen WS 3820 / 34 x 46 x 3
10	1	protection cap	PA6




upon request for low temperature and/or for offshore applications

Setting value on request between 30 and 50 kPa (-5/+7 kPa).

The fixed value will be marked onto the body.

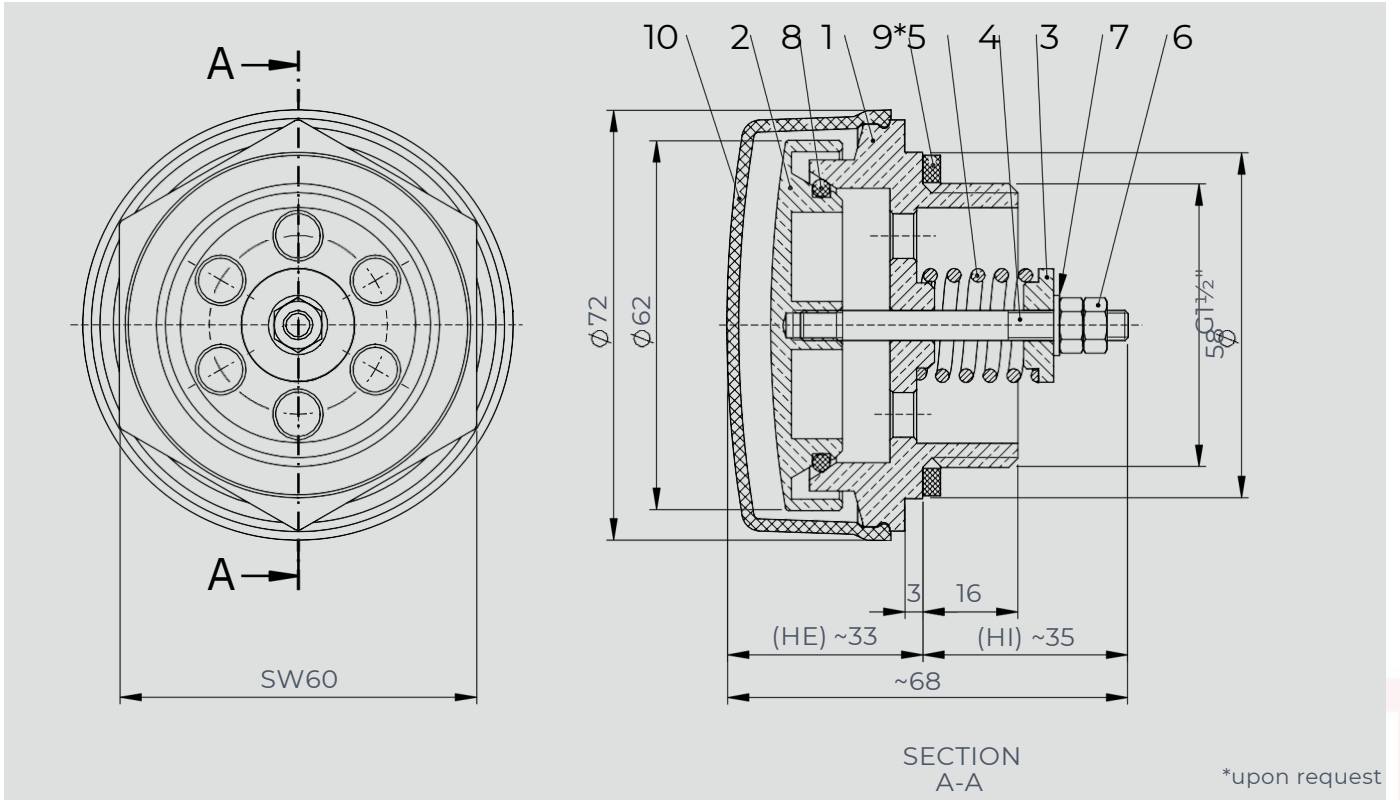

Item	Q'ty	Description	Remarks
1	1	body	CuZn40Pb2 (CW617N)
2	1	valve cap	CuZn40Pb2 (CW617N)
3	1	centering washer	CuZn40Pb2 (CW617N)
4	1	stud bolt	X8CrNiS18-9 (1.4305) / AISI 304
5	1	sp ring	X10CrNi18-8 (1.4310) / AISI 301
6	2	hex nut	DIN 934 - M 5 / A2-70
7	1	washer	DIN125A-M5/A2
8	1	O-ring	FKM (Viton)
9*	1	gasket	Hecker Centellen WS 3820 / 49 x 55 x 3
10	1	protection cap	PA6

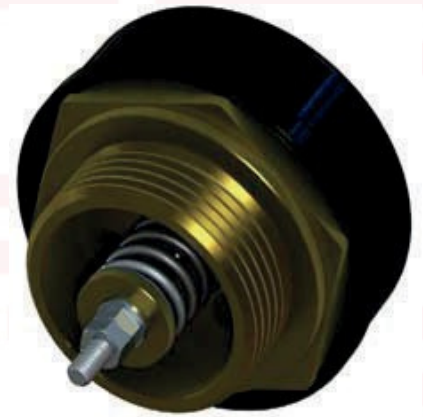


upon request for low temperature and/or for offshore applications

PRESSURE RELIEF DEVICE PRD 2"
IN ACCORDANCE WITH EN 50216-5

Setting value on request between 30 and 50 kPa (-5/+7 kPa).

The fixed value will be stamped onto the body.

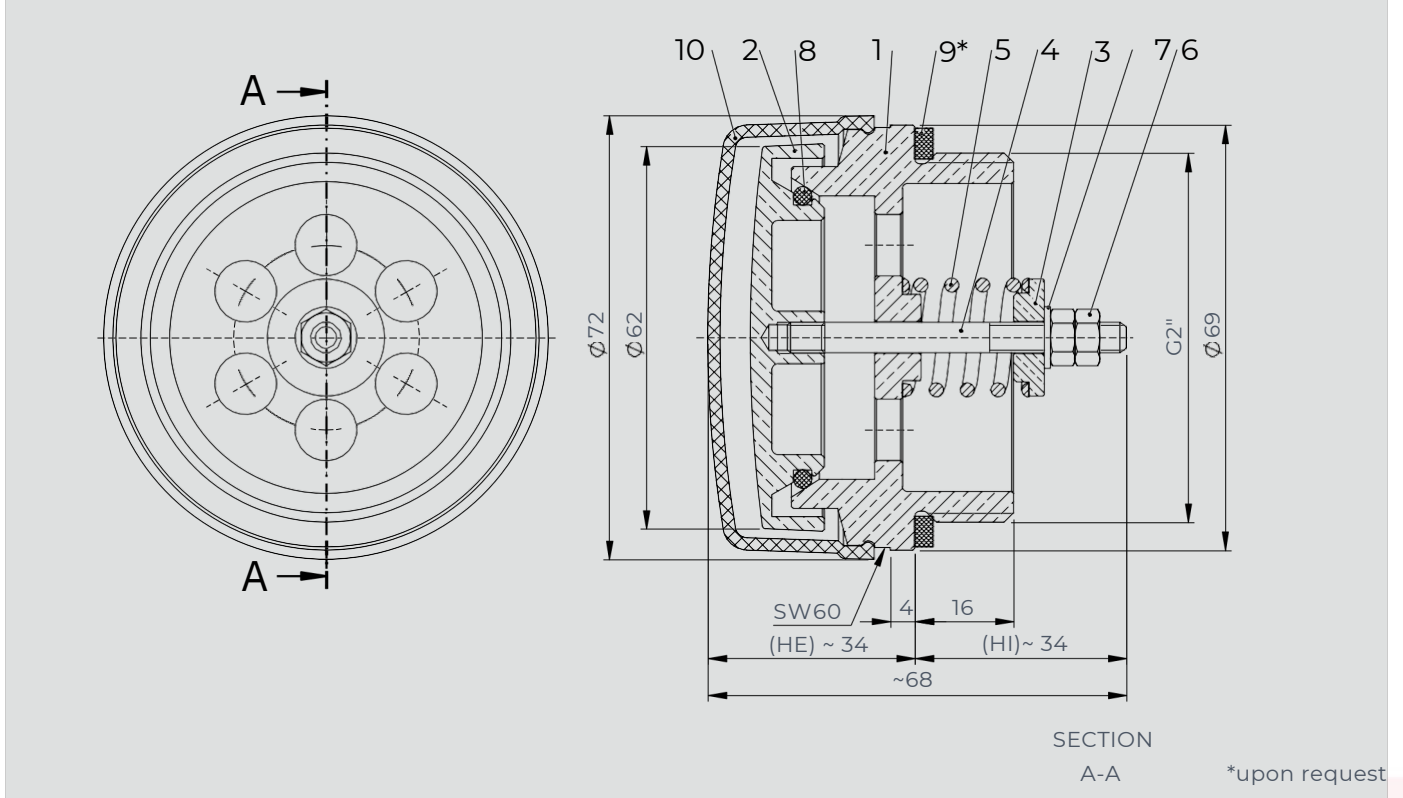

Item	Q'ty	Description	Remarks
1	1	body	CuZn40Pb2 (CW617N)
2	1	valve cap	CuZn40Pb2 (CW617N)
3	1	centering washer	CuZn40Pb2 (CW617N)
4	1	stud bolt	X8CrNiS18-9 (1.4305) / AISI 304
5	1	spring	X10CrNi18-8 (1.4310) / AISI 301
6	2	hex nut	DIN 934 - M 5 / A2-70
7	1	washer	DIN 125 A - M 5 / A2
8	1	O-ring	FKM (Viton)
9*	1	gasket	Hecker Centellen WS 3820
10	1	protection cap	PA6



upon request for low temperature and/or for offshore applications